



*Sheets*


CAPABILITIES

LED POSTERS

# POSTER LED DISPLAY

## POSTER LED DISPLAY

Digital LED Poster  
LED Banner

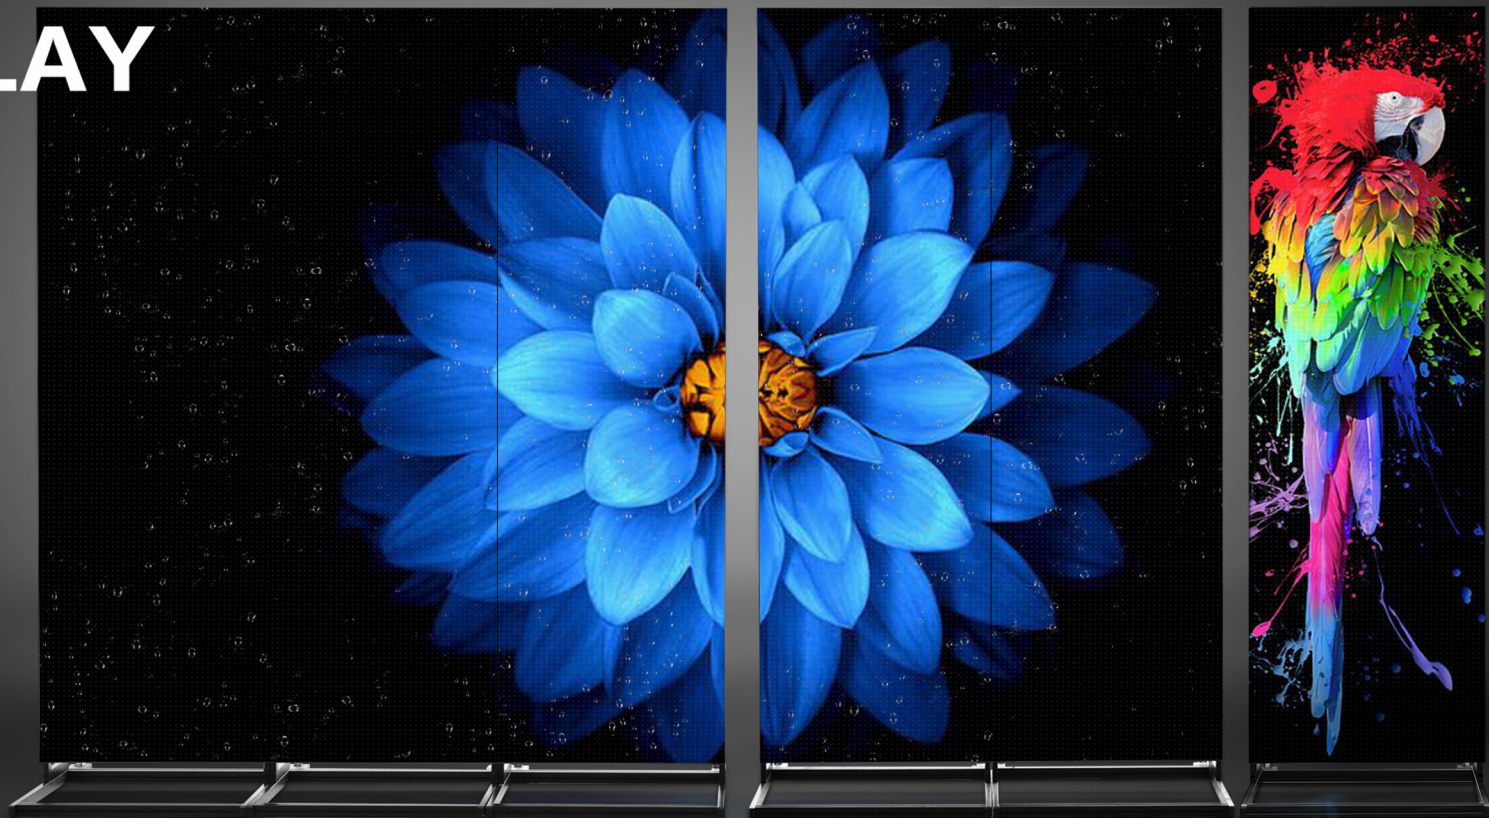

Sheets



# DISPLAY OVERVIEW



Integrate R&D, design, manufacturing, sales and service. ✓

NSE Providing LED poster solutions with unique design and stable performance ✓

Light Weight & Ultra-thin Frame ✓

Smart Control & Multiple-unit Cascade ✓

Wide Applicability, Indoor and Outdoor Models Available ✓

Fast Delivery, in stock ready for shipment ✓

# LED DISPLAY FEATURES

100%  
high temperature high humidity test

100%  
aging test

100%  
QC passed

100%  
vibration test

Full Series products has passed FCC/CE/ROHS/ISO Certificate.


For USA  
FCC

INDOOR DIGITAL LED POSTER

The infographic features a central image of a large LED display showing a blue and white wave pattern. Four callout lines point to different parts of the display: the top left, bottom left, top right, and bottom right. Each callout points to a circular badge containing the text '100%' followed by a specific test or certification. To the right of the display is a map of North America with a callout pointing to the United States, indicating FCC certification. Below the map is the FCC logo. At the bottom right, the text 'INDOOR DIGITAL LED POSTER' is displayed.



# CONNECTIVITY OPTIONS

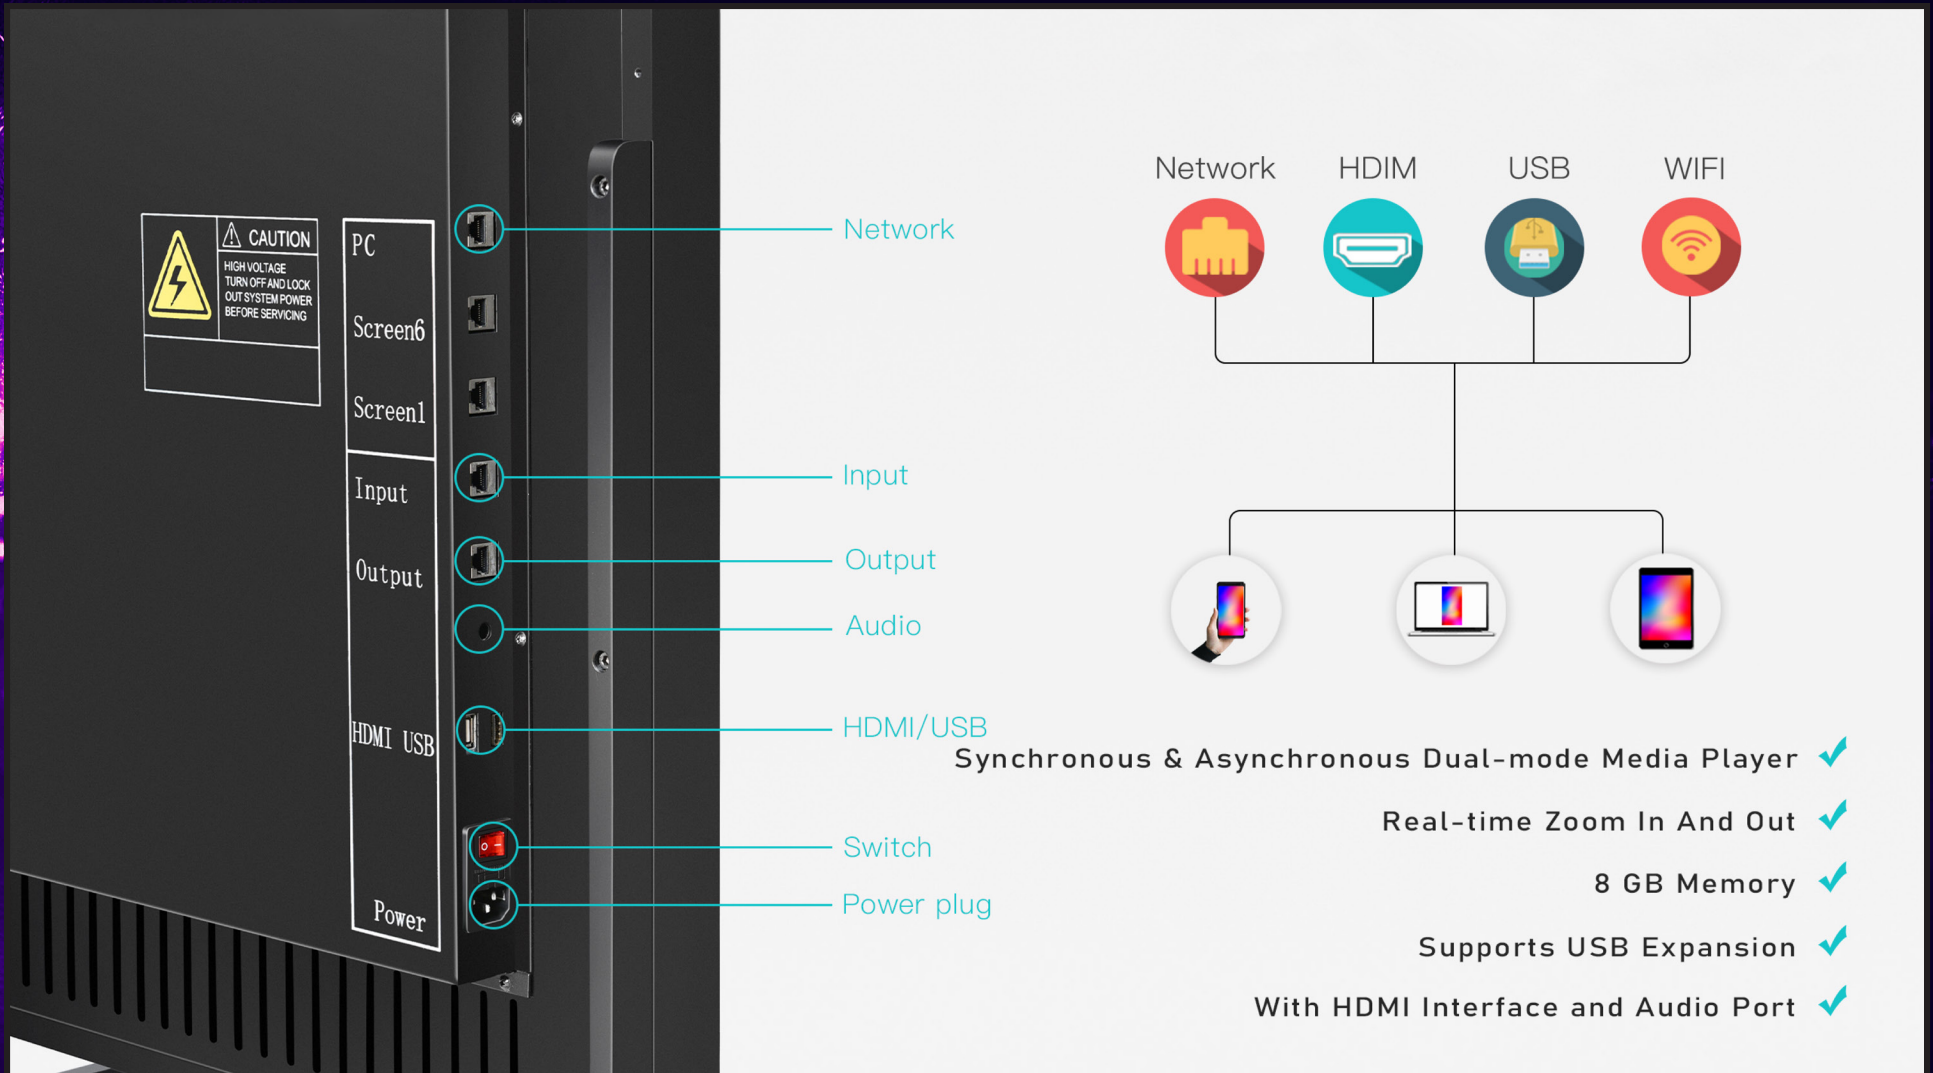

# MOUNTING OPTIONS

One device for multiple uses

Free-Standing ▽



Wall-Mounted ▽



Hanging ▽




Creative Stitching ▽



# EASE OF USE

To help consumer better use the product.  
We especially made a guide video for clients.  
The guide file will be sent with the Portable led poster.


**Can automatically play video,  
pictures, text, and other programs.**

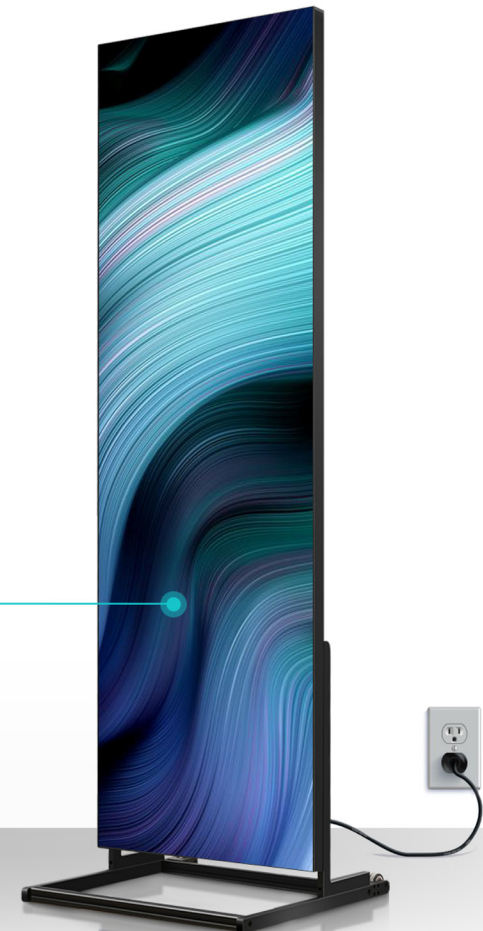



# PORTABILITY

LIGHT WEIGHT ✓  
ULTRA-THIN FRAME ✓




45mm

38kg







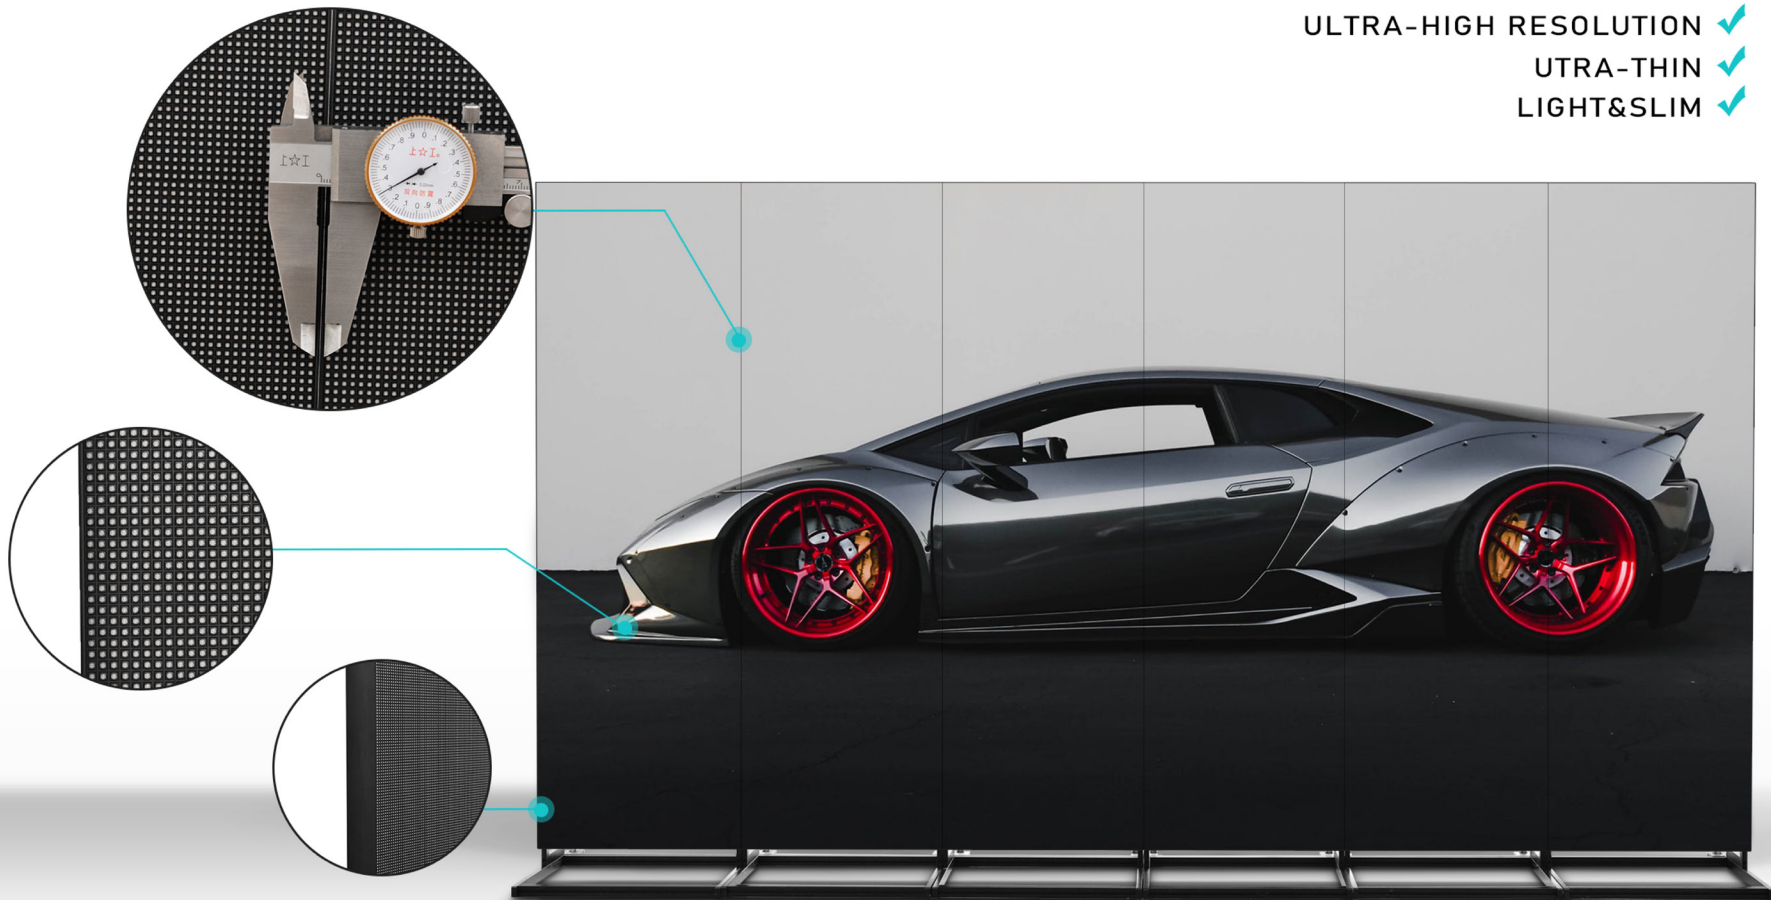





# MULTI-UNIT SPLICING

MULTIPLE-UNIT SPLICING ✓  
ULTRA-HIGH RESOLUTION ✓  
ULTRA-THIN ✓  
LIGHT&SLIM ✓



# APPLICATIONS

- ✓  SHOPPING MALLS
- ✓  HOTELS
- ✓  BANK
- ✓  BARS
- ✓  STORES
- ✓  HOSPITAL
- ✓  RESTAURANTS
- ✓  SCHOOL
- ✓  EXHIBITIONS
- ✓  EVENTS

.....







# AUTO BRIGHTNESS ADJUSTMENT

## ◀ BRIGHTNESS AUTOMATIC ADJUSTMENT ▶


To achieve a better advertising effect, the digital LED poster is able to connect with the speaker. Not only this, the LED poster support interactive function (customizable).

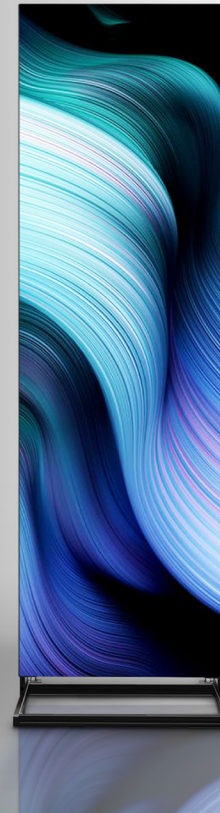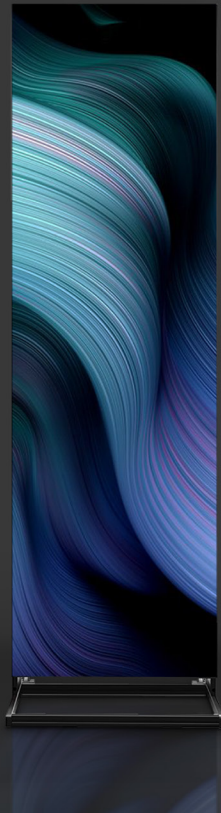

# OUTDOOR USE OPTION

OUTDOOR DIGITAL LED DISPLAY

INDOOR DIGITAL LED DISPLAY

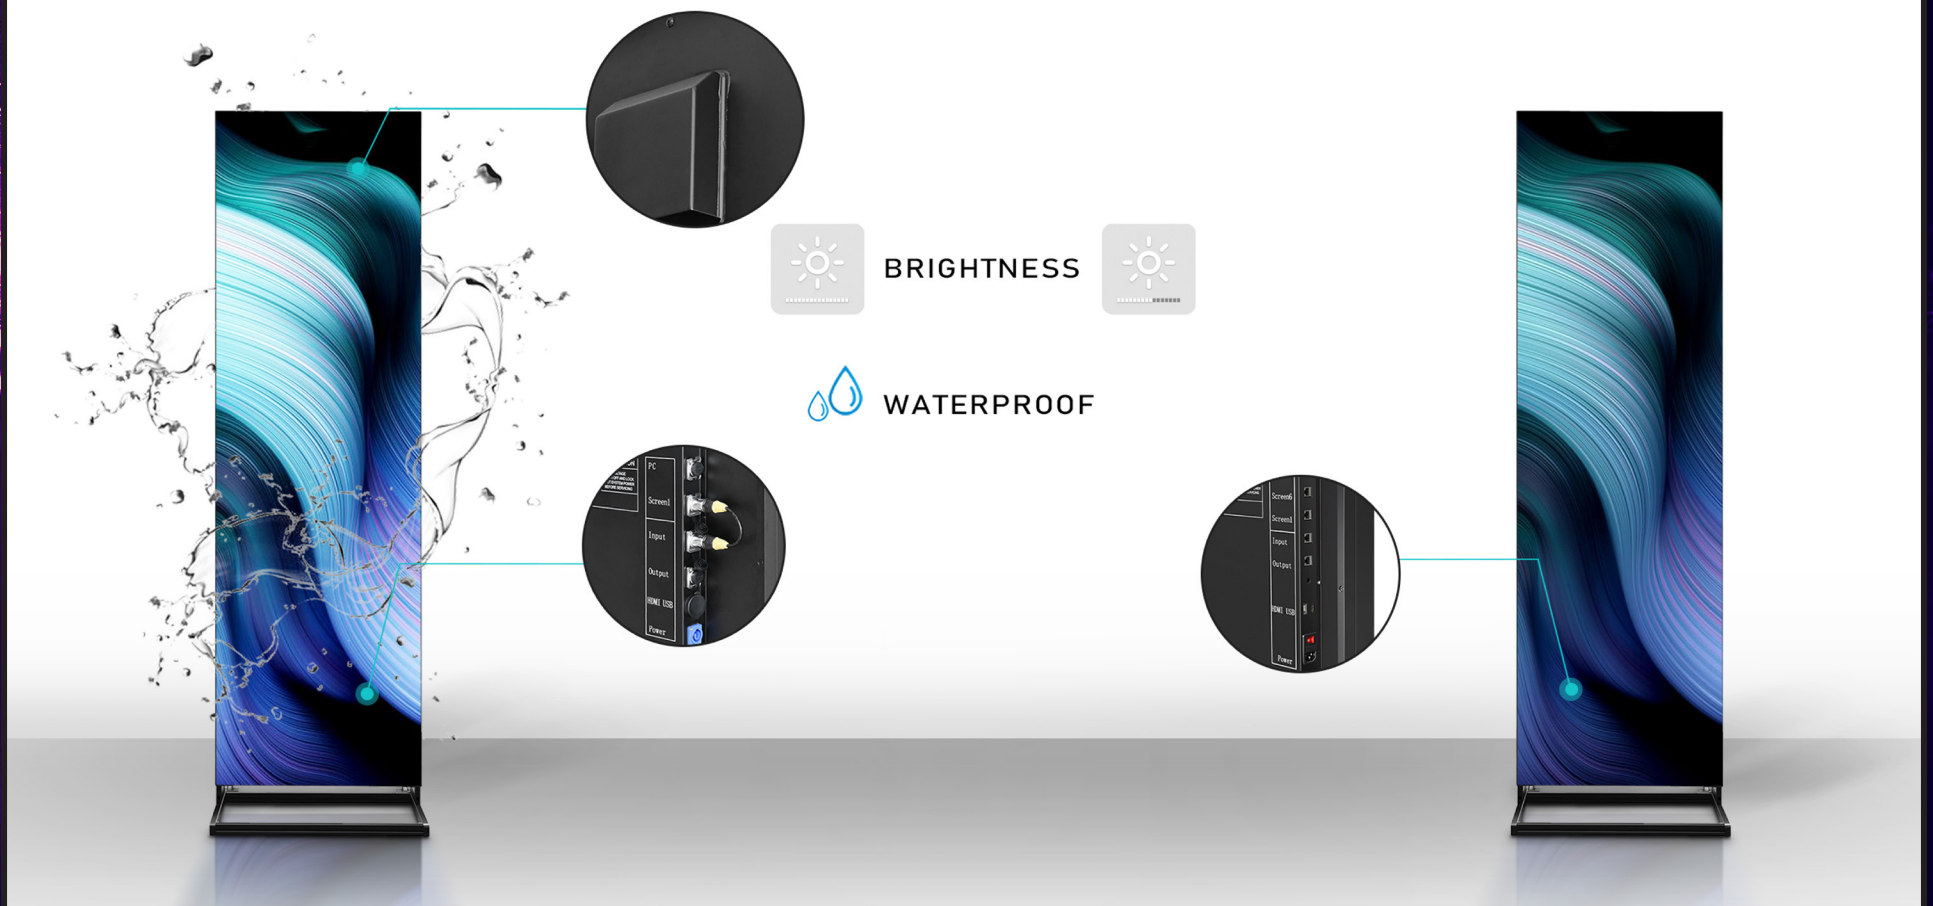



# CUSTOMIZATION



# TECHNICAL SPECIFICATIONS

P3 INDOOR DIGITAL LED POSTER ▽



35kg

Model Type	PT3
Pixel pitch	3 mm
Destiny	111,111 dots /SQM
LED Type	SMD 2121 Mat Black
Pixel type(R / G / B)	1R1G1B (3 in 1)
Module size	192 x 192mm
Module Resolution	64*64 pixel
Sreen Size (H*W)	576*1920mm
Feet Size	1.88 * 6.3 feet
Screen Resolution	192 * 640 pixel
Frame Size	1930mm(H)*584mm(W)*45mm(T)
Case Material	Aluminum
Weight	35kg/ unit
Drive mode	1/16scan
Viewing Distance	≥ 3 M
Brightness	≥ 1,000 cd/m²
Viewing Angle	140° (H)/140°(V)
Refresh rate	≥1,920 Hz (3840HZ optional)
Input voltage	AC90-240V
Maximum Power Consumption	600W per unit
Average Power Consumption	280W per unit
Control method:	Asynchronous (WIFI/USB/LAN/HDMI)
Temperature Operating (°C)	-40°~+75°
Working Humidity	10%-95%RH
IP Rating	IP20
Application	Indoor/ Semi-Outdoor
Certificate	CE/ROHS/FCC





# Sheets

**CONTACT:**

**CORPORATE & CASINO SALES**

**C: (702) 210-7111**

**EMAIL: [SHEETS@SHEETSWRAPS.COM](mailto:SHEETS@SHEETSWRAPS.COM)**

**[WWW.SHEETSWRAPS.COM](http://WWW.SHEETSWRAPS.COM)**



Sheets